
20 Ib ROOF LOAD SIDEWALL OPENING PIER LOAD 28' BOX WIDTH	SIDEWALL OPENING (FT) REQUIRED PIER LOAD (LBS)						
	3	4	5	6	8	10	
	1175	1330	1485	1640	1950	2260	

*FOR 30 Ib & 40 Ib ROOF LOAD REFER TO TABLES 7b & 7c IN THE INSTALLATION MANUAL

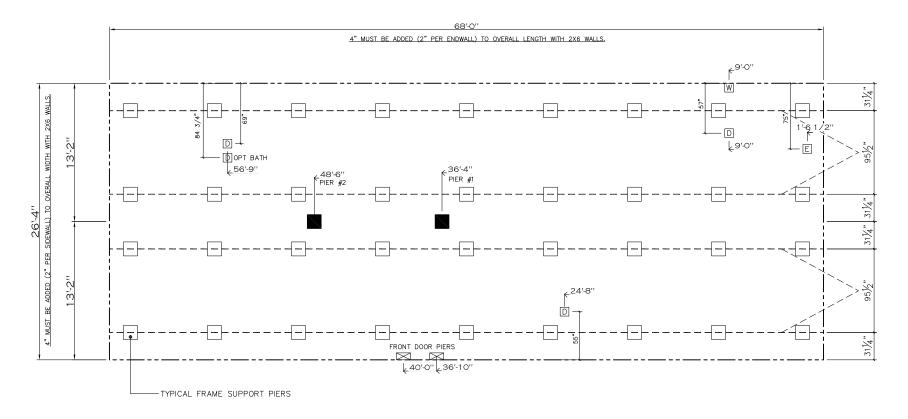

GENERAL NOTES:

- GENERAL NOTES:

 1. PIER LOADS SHOWN ARE TO BE USED TO SIZE THE FOOTINGS BELOW THE MARRIAGEWALL FOR COLUMN SUPPORT PIERS. REFER TO TABLES 6b AND 6c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS FOR HOMES THAT DO NOT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 7b AND 7c IN THE INSTALLATION MANUAL FOR LOAD ON FRAME PIER FOOTINGS THAT REQUIRE PERIMETER BLOCKING. REFER TO TABLES 10 AND 10g TO DETERMINE FOOTING SIZE FOR ALL PIERS.
- 2. REFER TO TABLE 9 FOR PIER CONFIGURATION AND MAXIMUM ALLOWABLE HEIGHTS. CROSS REFERENCE THE PIER HEIGHT WITH THE MAXIMUM ALLOWABLE FLOOR HEIGHT LISTED IN THE FRAME TIEDOWN CHARTS (TABLE 18, 19, AND 20).
- FLOOR WIDTH SHOWN IS FOR STANDARD PRODUCT ONLY. CONTACT THE MFG PLANT FOR SPECIFICATIONS OF OPTIONS ORDERED.
- 4. SERVICE DROP LOCATIONS IDENTIFIED ARE APPROXIMATE.
- 5. THE MAXIMUM SPACING FOR 8" I-BEAMS IS 8 FEET, 10" & 12" I-BEAMS ARE 10 FEET.

20 psf Roof Live Load						
Column	Distance	Pier Load				
Pier#	from Hitch	(lbs)				
1	36.333	2803				
2	2 48.5					

SERVICE DROP LEGEND

- E = ELECTRICAL DROP
- W = WATER INLET
- D = DWV PLUMBING DROP
- G = GAS INLET

PIER LEGEND □ = SUPPORT UNDER MATING OPENING

- _
- SUPPORT AT MATING COLUMN
- SUPPORT UNDER MATING WALL
- = PIER PORCH/RECESSED ENTRY
- = PIER MAIN BEAM
- □ = PIER PERIMETER

1790 SQ.FT. (STD PLAN "CONDITIONED") N/A SQ.FT. (W/OPT. PORCH/RECESS "CONDITIONED")

CMH	Model #: UXL28684A	Drawing #:	
MANUFACTURING	Date: 2/28/2 Scale: N.T.S.	29M183	
Product Designer: E. HARDWICK	28x68 Ultra Excel 684		
PIER LOADS			